


# iQ GRANIT SD




iQ Granit SD - 3096716

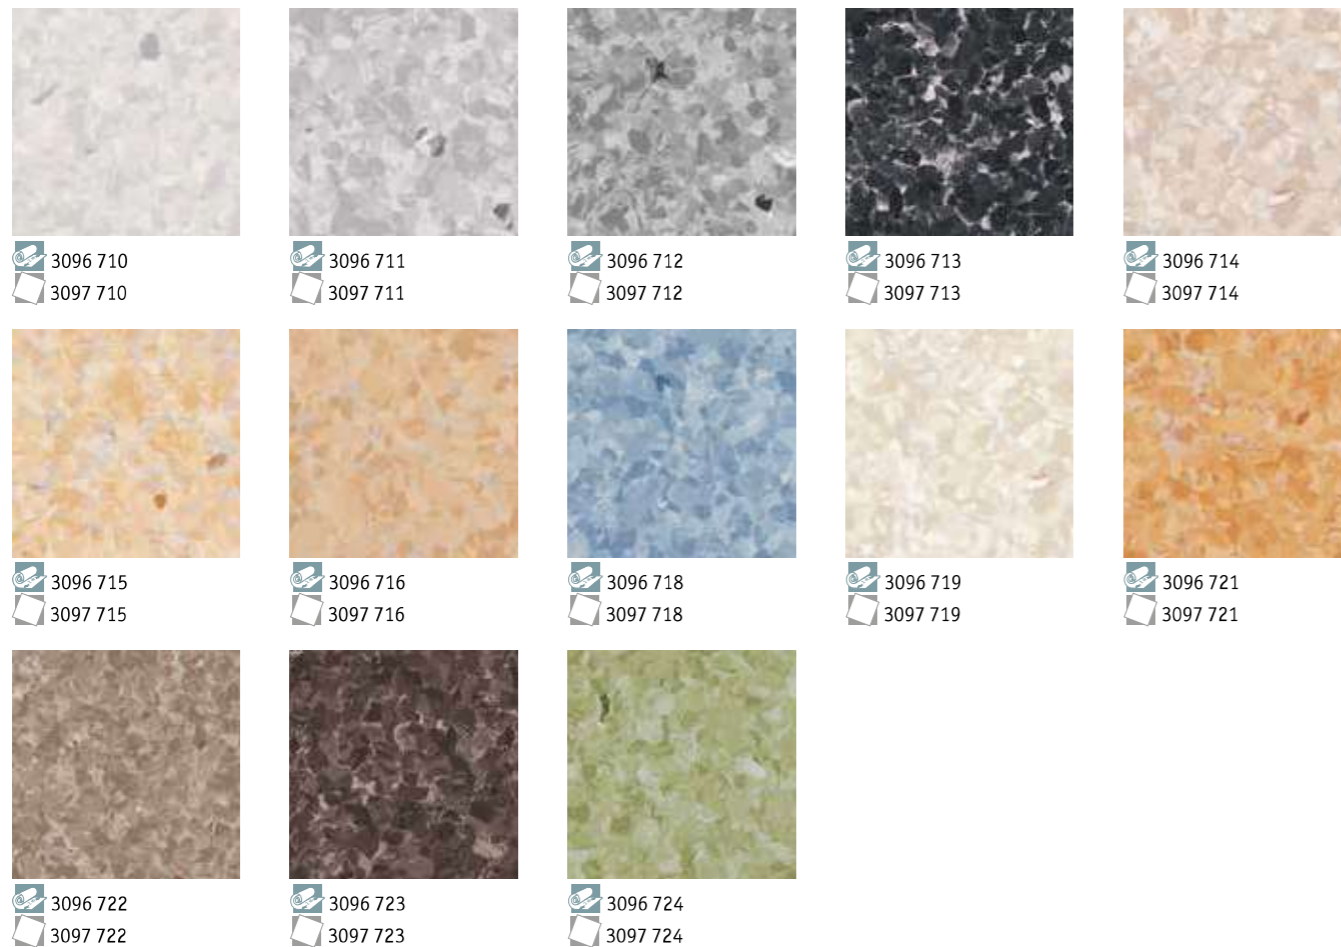

TECHNICAL DATA	STANDARDS	iQ Granit SD
<b>Classification</b>		
Type of floor covering	ISO 10581 - vinyl	Permanently static dissipative pressed homogeneous vinyl flooring
Classification	ISO 10581 - vinyl domestic commercial light industrial	Classes: - 34 43
<b>Characteristics</b>		
Wear layer thickness	ISO 24340	2.00mm
Total thickness	ISO 24346	2.00mm
Total weight	ISO 23997	2 950g/m <sup>2</sup>
Surface Treatment		iQ Pur
Flexibility	ISO 23344 (EN 435 Method A)	Pass
<b>Technical performance</b>		
Residual indentation	Best measured value	0.02mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>s</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Dimensional stability	ISO 23999	≤ 0.40% for rolls ≤ 0.25% for tiles
Castor chair test	ISO 4918	Suitable
Thermal resistance Underfloor heating	EN ISO 10456	0.01m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	> level 7
Electrical insulation	VDE 100, Part 600	R <sub>i</sub> ≥ 5x10 <sup>4</sup> Ω
Static electrical charge	EN 1815	< 2kV
Electrical resistance	ESD-approval SP-method 2472 EN 1081 EN/IEC 61340-4-1, 100 V	10 <sup>6</sup> ≤ R ≤ 10 <sup>8</sup> ohms R <sub>1</sub> ≤ 10 <sup>8</sup> ohms R <sub>2</sub> ≤ 10 <sup>8</sup> ohms R ≤ 10 <sup>8</sup> ohms
Chemical resistance	ISO 26987	Excellent
Fungi and bacteria resistance	DIN EN 846 part C	Does not favour growth
Underfloor heating	—	Suitable - max 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

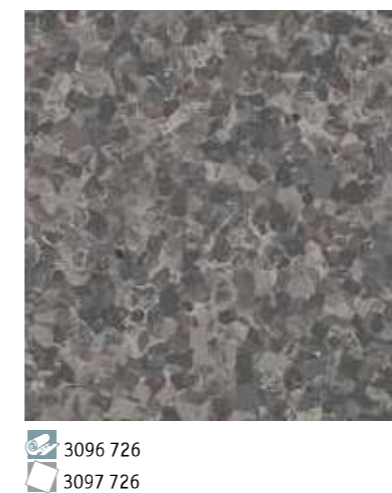

## iQ GRANIT SD

### Main Product Features

- 14 colours available both in sheets and tiles
- Colour coordinated with iQ Granit
- 10<sup>6</sup> ≤ R ≤ 10<sup>8</sup> ohms
- Unique patented conductive iQ PUR

### Surface Treatment



### Sustainability Tag



### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction:

Available in tiles

Laying direction:

### General Information

