


PRIMO SD



Primo SD - 21012 XXX

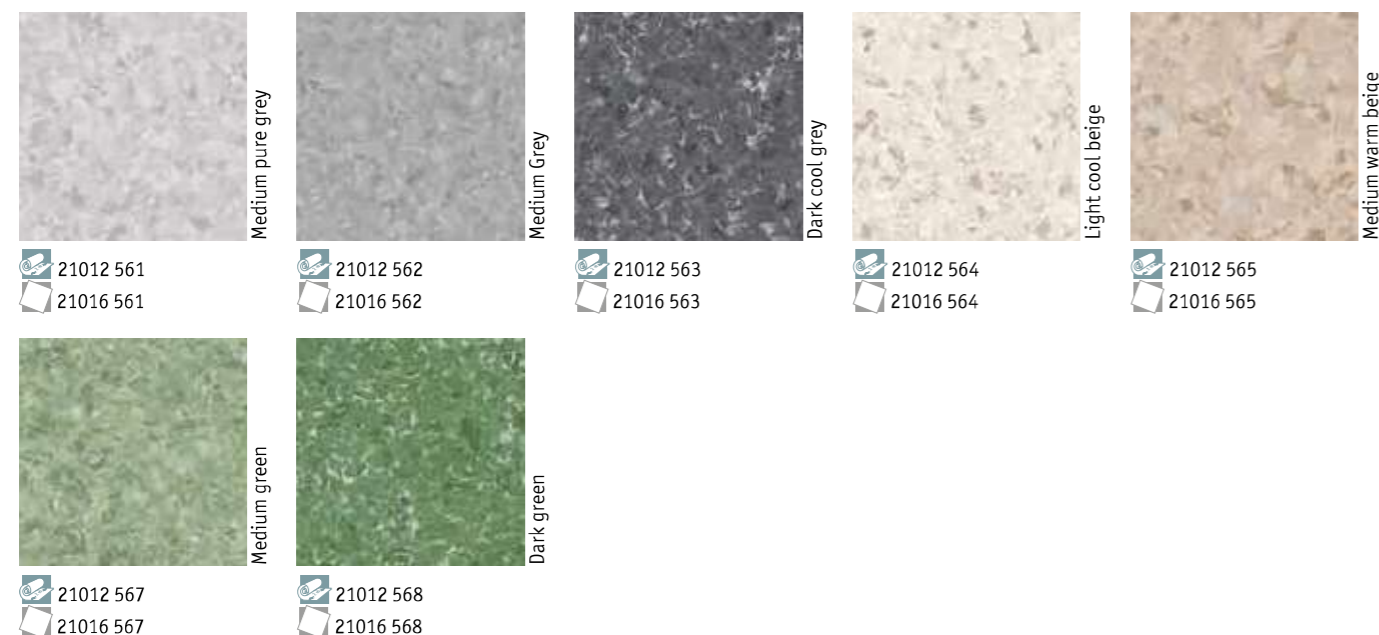

TECHNICAL DATA	STANDARDS	Primo SD
Classification		
Classification	ISO 10581	Static dissipative pressed homogeneous vinyl flooring
Classification	ISO 11638	-
Classification	EN 13845	-
Classification	EN ISO 10874	34-43
Wear layer binder content	ISO 10581	-
Wear layer binder content	ISO 11638	-
Technical characteristics		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3000 g/m ²
Wear layer thickness	EN ISO 24340	-
Foam layer thickness	EN ISO 24340	-
Adhesive foil thickness	EN ISO 24340	-
Surface treatment		-
Form of delivery		
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 lm x 200 cm Art. no. 21012 ___ 3 digit colour number
Form of delivery	EN ISO 24342 Tiles (box)	61 x 61 cm - 16 tiles/box = 5.95 m ² Art. no. 21016 ___ 3 digit colour number
Performances for CE marking requirements (EN 14041)		
Declaration of Performance		
Declaration of Performance	EN 14041	0019-0047-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _{s1} ≥ 8 kW/m ² Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m ² K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip
Technical performances		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm
Impact sound reduction	EN ISO 717/2	-
Slip resistance	DIN 51130	R9
Clean room test	ASTM F24 F51 ISO 14644-1	- -
Ease of decontamination	ISO 8690	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Chemical resistance	ISO 26987	Good resistance
Castor chair	ISO 4918	Suitable
Flexibility	ISO 24344	Pass
Dimensional stability	EN ISO 23999	≤ 0.40 % for rolls ≤ 0.25 % for tiles
Light fastness	EN ISO 105-B02	≥ 6
Electrical insulation	VDE 0100, Part 600	R _i ≥ 5x10 ⁴ Ω
Electrical resistance	EN 1081	R _i ≤ 10 ⁸ Ω
Bare foot test	DIN 51097	-
Seam strength	EN 684	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm
Underfloor heating		Suitable - max. 27°C
Environmental performances		
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10 µg/m ³ (after 28 days) Platinum
Colours		8

The above information is subject to modification for the benefit of further improvement. (04/18). *For information -not binding. According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

PRIMO SD

Main Product Features

- Economical ESD protection
- Electrical resistance of $R_i \leq 10^8 \Omega$
- 9 versatile colours available both in sheets and tiles
- Colour-coordinated with Primo Premium and Eclipse Premium

Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 23lm

Laying direction:

Available in tiles

Laying direction:

General Information

