

STANDARD PLUS



Standard Plus - 21003 924



21 003 497
21 004 497



21 003 924
21 005 924
21 006 924



21 003 498
21 004 498
21 005 498
21 006 498




21 003 499




21 003 910



21 003 911
21 004 911
21 005 911
21 006 911



21 003 482
21 004 482



21 003 912
21 004 912



21 003 913
21 005 913
21 006 913



21 003 914



21 003 915

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	
Binder content	ISO 10581	Type II	
Technical performance			
Residual indentation	Best measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _s s1 ≥ 8 kW/m ² Pass	
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	-	
Static electrical charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 6	
Chemical resistance	ISO 26987 (EN 423)	Good resistance	
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	
Clean room test	ASTM F51/00	Class A	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.



21 003 496

STANDARD PLUS

Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

Surface Treatment



Sustainability Tag



Logistics Information

Available in rolls
Rolls length: 231m (2.0mm)

Rolls length: 251m (1.5mm)

Laying direction:

Available in tiles

Laying direction:

General Information



STANDARD PLUS






Standard Plus - 21003 483



 21 003 921 21 005 921 21 006 921	 21 003 922 21 004 922	 21 003 923	 21 003 494 21 004 494 21 005 494 21 006 494	 21 003 919 21 004 919
 21 003 492 21 004 492 21 005 492 21 006 492	 21 003 920	 21 003 479 21 004 479 21 005 479 21 006 479	 21 003 483 21 005 483 21 006 483	 21 003 484
 21 003 485	 21 003 916 21 004 916	 21 003 917	 21 003 488	 21 003 918

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	
Binder content	ISO 10581	Type II	
Technical performance			
Residual indentation	Best measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B ₁ s1 ≥ 8 kW/m ² Pass	
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTFC Part 5 and 2 IMO Res. A653	-	
Static electrical charge	EN 1815	< 2kV	
Light fastness	EN ISO 105-B02	≥ 6	
Chemical resistance	ISO 26987 (EN 423)	Good resistance	
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	
Clean room test	ASTM F51/00	Class A	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

 21 003 495 21 004 495	 21 003 493 21 005 493 21 006 493
 21 003 500	

STANDARD PLUS


Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance



Surface Treatment


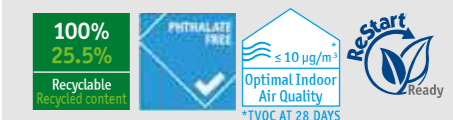


Sustainability Tag



Logistics Information

-  Available in rolls
Rolls length: 231m (2.0mm)
-  Rolls length: 251m (1.5mm)

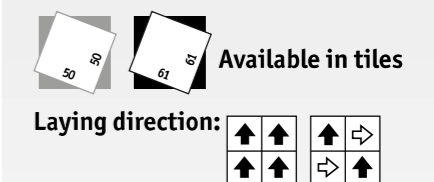

General Information

